



Spec Sheet – 2300 Series – RV Electrical Input Systems

Included Features:

Housing and Spool

– water tight housing and spool made of tough UVU and chemically resistant plastics

30 AMP Electrical Cord

– 30 AMP 10/3 RV approved Electrical cord, male plug one end, stripped ends on other.

Comes with either 25, 28, 30, 33 or 36' lengths.

Contact us for custom lengths.

Dimensions:

A. Faceplate Flange Diameter

- 330 mm / 13 inches

B. Installation Hole Diameter

- 293 mm / 11.5 inches

C. Depth (including faceplate)

- 242 mm / 9.5 inches

D. Depth (excluding faceplate)


- 216 mm / 8.5 inches

Mounting Screw Radius

- 157 mm / 6.1875 inches (12 screws – 30 degree spacing)

Weight (approximate)

- 2325 (25 foot cord) 4.98 kgs / 11 lbs

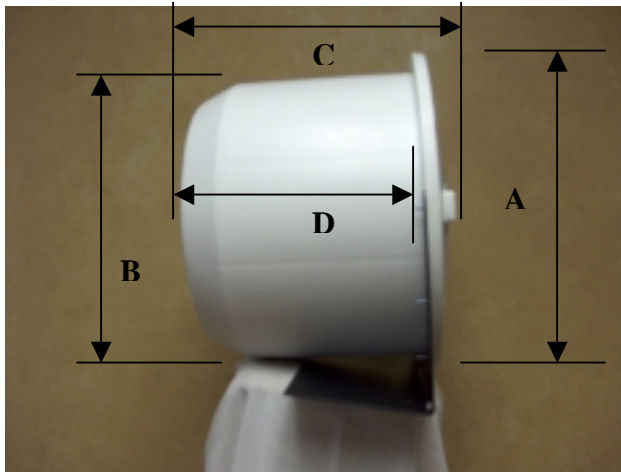

Required Mounting Hardware (not included):

- 12 - #8 x 3/4" pan head screws (length may vary depending on RV wall construction)
- Mounting Flange Caulking


1 1/2 inch Installation Hole Cutting Kit:

(Includes):

- 1 cutting ring template
- 1 router guide bushing and lock nut
- 1 straight cut bit (1/2 inch shank, 2 1/2 inch carbide cutters)

(Required equipment not included with kit):

- 2 inch plunge router with 1/2 inch chuck

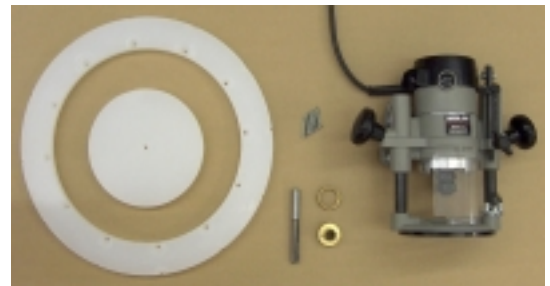

*We reserve the right to substitute or improve components in order to enhance our product design without prior notice.

Reel RV Products Incorporated Site 401 Comp 2 RR2 Wetaskiwin Alberta Canada T9A 1W9
 Phone: 780 352-0113 Fax: 780352-4430 E-Mail: sales@reelrv.com Web Site: www.reelrv.com