




Spec Sheet – 2100 Series – RV Water Input Systems – Model 2125/2150

Included Features:

- | | |
|----------------------|---|
| Housing and Spool | - water tight housing and spool made of tough UVU and chemically resistant plastics |
| Hose | - 25 or 50 foot ½ inch reinforced medical grade vinyl boat and camper hose |
| Strap & Cap Assembly | - Threaded dust cap with attaching strap |
| Backflow Valve | - CSA and RV approved backflow valve with ½ inch FPT connection. |

Dimensions:

- | | |
|--------------------------------|--|
| A. Faceplate Flange Diameter | - 330 mm / 13 inches |
| B. Installation Hole Diameter | - 293 mm / 11.5 inches |
| C. Depth (including faceplate) | - 242 mm / 9.5 inches |
| D. Depth (excluding faceplate) | - 216 mm / 8.5 inches |
| Mounting Screw Radius | - 157 mm / 6.1875 inches (12 screws – 30 degree spacing) |
| Weight (approximate) | - 2125 (25 foot hose) 2.53 kgs / 5.58 lbs |
| | - 2150 (50 foot hose) 3.55 kgs / 7.85 lbs |

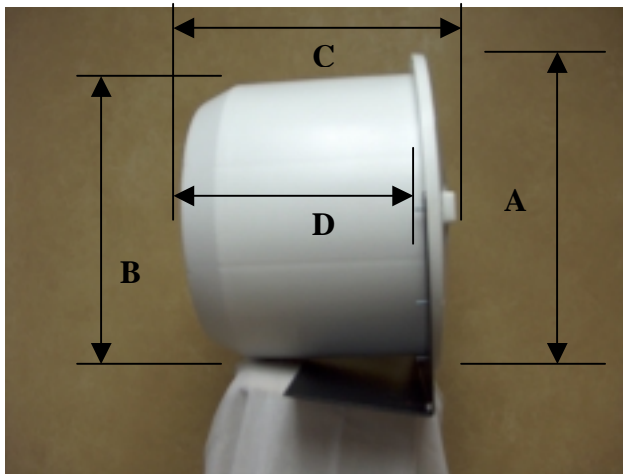


Required Mounting Hardware (not included):

- 12 - #8 x ¾” pan head screws (length may vary depending on RV wall construction)
- Mounting Flange Caulking
- Plumbing Fittings and Connector from Included Backflow Valve

1 ½ inch Installation Hole Cutting Kit:

- (Includes):
- 1 cutting ring template
 - 1 router guide bushing and lock nut
 - 1 straight cut bit (½ inch shank, 2 ½ inch carbide cutters)
- (Required equipment not included with kit):
- 2 inch plunge router with ½ inch chuck

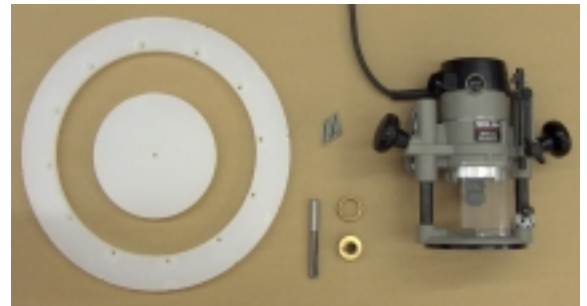

*We reserve the right to substitute or improve components in order to enhance our product design without prior notice.

Reel RV Products Incorporated Site 401 Comp 2 RR2 Wetaskiwin Alberta Canada T9A 1W9

Phone: 780 352-0113 Fax: 780352-4430 E-Mail: sales@reelrv.com Web Site: www.reelrv.com